



STONE POLYMER BAMBOO

GOLDENELITEGROUP.COM.AU



Golden Elite Group



Proud to be a Member of the
atfa[®]
Australian Timber Flooring Association
Local professionals, world-class standards


SUPERIOR SCRATCH
RESISTANCE



PET PROOF



INSTALLATION
ON ANY SURFACE



SOUND
REDUCING PAD



FAST & SECURE
CLIP SYSTEM



100% WATER
PROOF



STONE POLYMER BAMBOO

A Sustainable Flooring Solution

- Eco-Friendly
- Quick and Easy to Install
- Click System
- 100% Waterproof
- Acoustic Qualities
- Sound Reducing Attached Underlay
- Good Foot Feel
- Durable, Easy to Clean / Maintain
- 25-Year Residential Warranty;
5-Year Commercial Warranty
- Formaldehyde free, Pet friendly
- No scratches, High heel safe - no dents



WHY SPB?

- **Waterproof**

100% waterproof, can be installed in kitchens, bathrooms, laundry rooms and restaurants without any worries!

- **Stability**

The SPB rigid core is more stable in environments with temperature changes, such as cabins, homes with AC units and homes with humidity fluctuations.

- **Comfort, Healthy & Quiet**

Formaldehyde free.

100% natural cork backing. No hollow sound when walking on it.

- **Click-installation system**

40% faster to install than glue down floors. No glues or extra tools are required!

- **Affordability**

Budget friendly. No further spending on underlay as it can be installed as-is on the subfloor. Saves time on installation. Makes DIY flooring jobs easier.

- **Easy Maintenance**

Designed to be easily cleaned with regular sweeping and mopping

- **REAL BAMBOO Veneer**

NO repeated patterns. A variety of looks, textures and styles. SPB can be fitted in bathrooms, kitchens, yoga / fitness studios etc.



SPB COLOUR RANGE

COFFEE
GESPB01



HONEY
GESPB02



NATURAL
GESPB03



SOHO
GESPB04



VINTAGE GREY
GESPB05



HONEY
GESPB02

PRODUCT GALLERY




**COFFEE
GESPB01**



PROJECT GALLERY

Project Location
Calamvale
Finish Date
March 2019

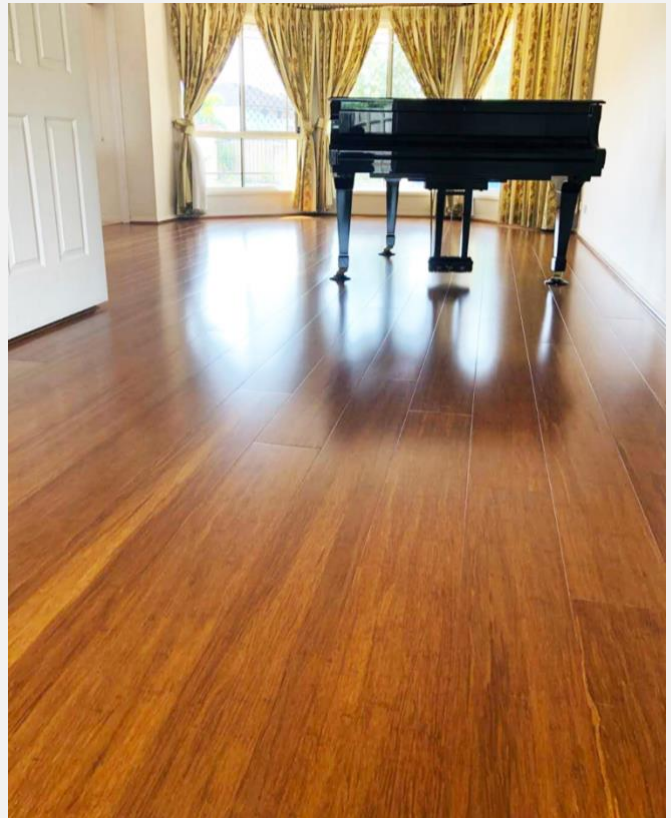

Project Location
The Gap
Finish Date
February 2019



SPECIFICATIONS

SPB	
PLANK THICKNESS	8 MM
PLANK SIZE	1850 MM X 142MM
BOX	6 PCS
AREA PER BOX	1.58 M ²

TECHNICAL DATA	
TYPE	HYBRID
COLOURS	5
BACKING LAYER	1.5MM ACOUSTIC CORK
SUBSTRATE LAYER	ENGINEERED RIGID CORE
TOP LAYER	DURABLE WEAR LAYER
PROTECTIVE COATING	CERAMIC MATT UV COATING
INSTALLATION METHOD	CLICK SYSTEM



TEST REPORTS



TEST REPORT		
TEST ITEM	DATA / CONCLUSION	
WET PENDULUM TEST	SLIP RESISTANCE VALUE: 39	CLASS: P3
FIRE TEST	MEAN VALUE: 8.6 kW/M ²	CHARRING
LOCKING STRENGTH	659.2N / 1209N	
ABRASION RESISTANCE	PASS	SWELLING: 0-0.1%
DBP/ BBP/ DEHP/ DIBP/ DNOP/DMP/ DPhP/ DnHP/ DEP CONTENT(S)	PASS	
PEEL STRENGTH	37.7N/25mm	PASS
MIGRATION OF CERTAIN ELEMENTS	PASS	
RESISTANCE TO SURFACE WEAR	PASS	
COLOUR FASTNESS TO LIGHT	BETTER THAN 6 GRADE (B.W.S)	
FORMALDEHYDE	0.003 MG/M ³	E0
OTHER VOLATILE ORGANIC COMPOUNDS	NOT DETECTABLE	PASS
ACOUSTIC TEST	L'nT,w: 52 / FIIC: 51	PASS



Golden Elite Group



Address: 2/231 Holt St, Pinkenba QLD 4113

Email: orders@goldenelitegroup.com.au

<http://www.goldenelitegroup.com.au>

<http://en.newpearl.com>