

# STONE POLYMER TIMBER

[GOLDENELITEGROUP.COM.AU](http://GOLDENELITEGROUP.COM.AU)



*Golden Elite Group*



Proud to be a Member of the

**atfa**<sup>®</sup>  
Australian Timber Flooring Association  
*Local professionals, world-class standards*




SUPERIOR SCRATCH  
RESISTANCE



PET PROOF



INSTALLATION  
ON ANY SURFACE



SOUND  
REDUCING PAD



FAST & SECURE  
CLIP SYSTEM



100% WATER  
PROOF



# STONE POLYMER TIMBER

## A Sustainable Flooring Solution

- 1.2mm Real Timber Veneer
- French Oak and Australian Wood Veneer
- Click System
- 100% Waterproof
- Acoustic Cork Base  
Sound Reducing Attached Underlay
- Good Foot Feel
- Durable, Easy to Clean / Maintain
- 25-Year Residential Warranty;  
5-Year Commercial Warranty
- Formaldehyde free, Pet friendly
- No scratches, High heel safe - no dents



# WHY SPT?

- **Waterproof**

100% waterproof, can be installed in kitchens, bathrooms, laundry rooms and restaurants without any worries!



- **Stability**

The SPT rigid core is more stable in environments with temperature changes, such as cabins, homes with AC units and homes with humidity fluctuations.

- **Comfort, Healthy & Quiet**

Formaldehyde free.

100% natural cork backing. No hollow sound when walking on it.



- **Click-installation system**

40% faster to install than glue down floors. No glues or extra tools are required!

- **Affordability**

Budget friendly. No further spending on underlay as it can be installed as-is on the subfloor. Saves time on installation.

Makes DIY flooring jobs easier.

- **Easy Maintenance**

Designed to be easily cleaned with regular sweeping and mopping



- **REAL TIMBER Veneer**

NO repeated patterns. A variety of looks, textures and styles.

SPT can be fitted in bathrooms, kitchens, yoga / fitness studios etc.





# SPT COLOUR RANGE

**GESPT001**  
**SMOULDER OAK**

**GESPT002**  
**LIMED OAK**

**GESPT003**  
**LIGHT AMERICAN WALNUT**

**GESPT004**  
**LATTE OAK**

**GESPT005**  
**BLACK BUTT**

**GESPT006**  
**SPOTTED GUM**

**GESPT007**  
**TASMAN OAK**


**GESPT008**  
**JARRAH**



# PRODUCT GALLERY



GESPT008  
JARRAH

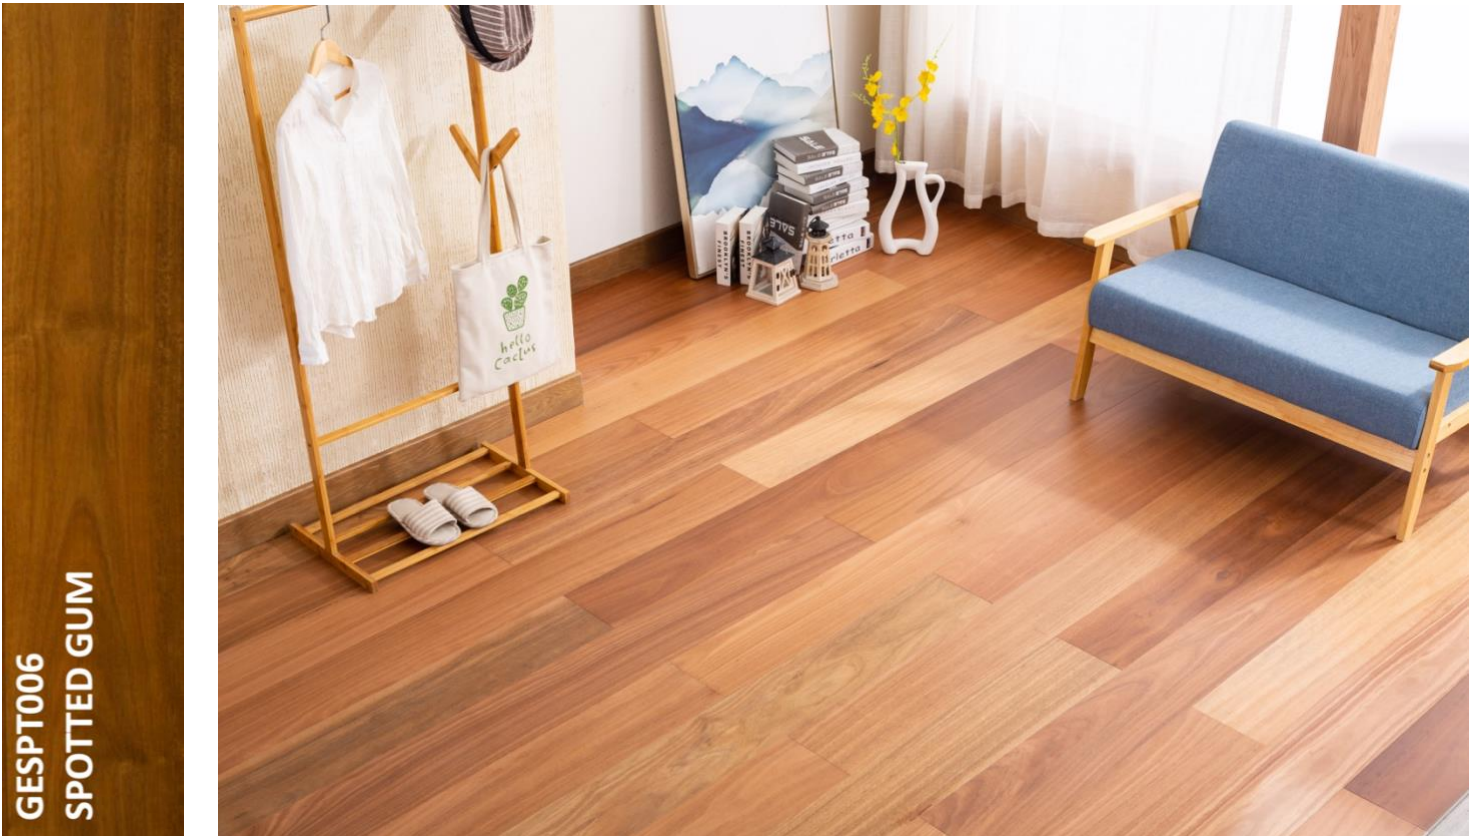

GESPT006  
SPOTTED GUM



# PRODUCT GALLERY



GESPT004  
LATTE OAK



GESPT007  
TASMAN OAK



# SPECIFICATIONS



FRENCH OAK (LATTE OAK, LIGHT AMERICAN WALNUT, LIMED OAK, SMOULDER OAK)		AUSTRALIAN WOOD (SPOTTED GUM & BLACK BUTT)	
PLANK THICKNESS	7MM	PLANK THICKNESS	8MM
PLANK SIZE	1900MM X 185MM	PLANK SIZE	1900MM X 190MM
BOX	5 PCS	BOX	5 PCS
AREA PER BOX	1.76M <sup>2</sup>	AREA	1.81M <sup>2</sup>

TECHNICAL DATA	
TYPE	HYBRID
COLOURS	6
BACKING LAYER	1.5MM ACOUSTIC CORK
SUBSTRATE LAYER	ENGINEERED RIGID CORE
TOP LAYER	1.2MM TIMBER VENEER
PROTECTIVE COATING	LED UV COATING
INSTALLATION METHOD	DROP LOCK



# TEST REPORTS



TEST REPORT		
TEST ITEM	DATA / CONCLUSION	
WET PENDULUM TEST	SLIP RESISTANCE VALUE: 39	CLASS: P3
FIRE TEST	MEAN VALUE: 4.84 kW/M <sup>2</sup>	CHARRING
LOCKING STRENGTH	1005N / 1212N	
ABRASION RESISTANCE	No Wear-through Coating	PASS
DBP/ BBP/ DEHP/ DIBP/ DNOP/DMP/ DPhP/ DnHP/ DEP CONTENT(S)	PASS	
MIGRATION OF CERTAIN ELEMENTS	PASS	
COLOUR FASTNESS TO LIGHT	BETTER THAN 6 GRADE (B.W.S)	
FORMALDEHYDE	0.050 MG/M <sup>3</sup>	E0
OTHER VOLATILE ORGANIC COMPOUNDS	NOT DETECTABLE	PASS
ACOUSTIC TEST	L'nT,w: 52 / FIIC: 53	PASS
IMMERSION AND DELAMINATION TEST	There is no visible delamination between the surface finish and the substrate.	
HEAT STABILITY	PASS	



*Golden Elite Group*



Address: 2/231 Holt St, Pinkenba QLD 4113

Email: [orders@goldenelitegroup.com.au](mailto:orders@goldenelitegroup.com.au)

<http://www.goldenelitegroup.com.au>

<http://en.newpearl.com>