

HYDROPLANK NEW GEN WPC FLOORING







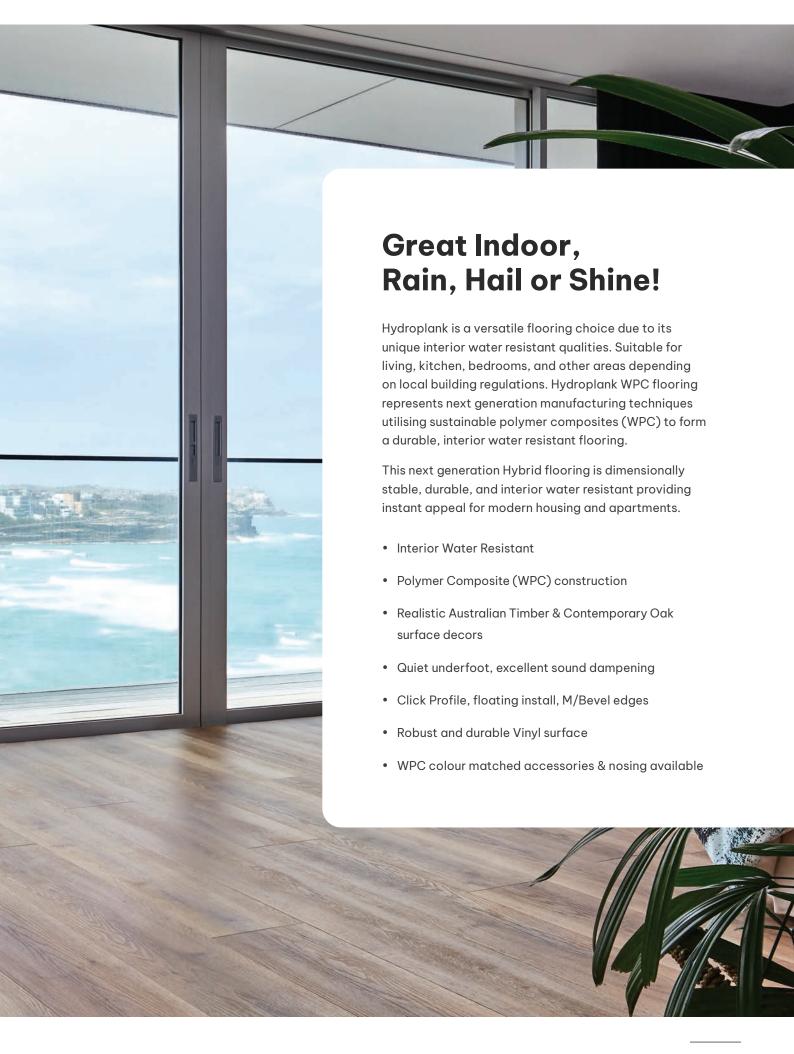

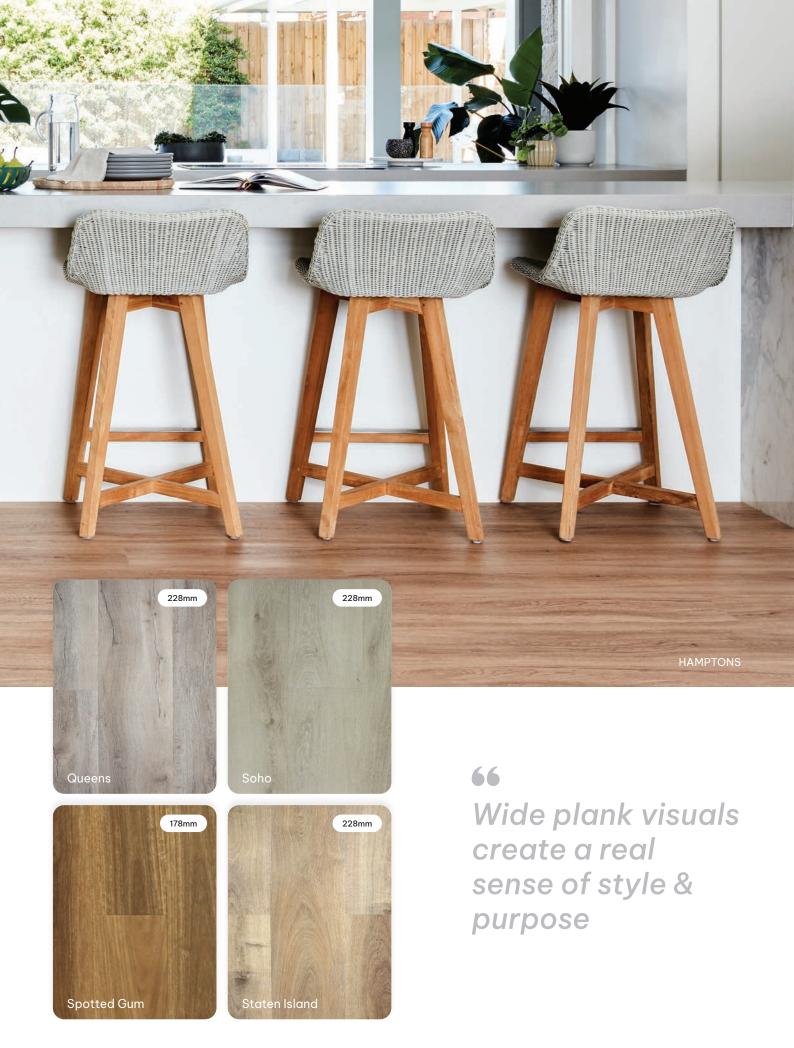









Technical Specifications

KEY FEATURES

Interior water resistant, check local building authority for wet area installation. Patented click for easy install. WPC flooring provides a robust surface with good dimensional stability. Excellent for renovations over existing ceramic tiles, minimal telegraphing. High impact surface resistance. Super Width planks. Attached acoustic underlay to enhance walking comfort, warmth and minimise sound transmission

DESCRIPTION & PROFILE

WPC construction. Patented Click profile. Micro Bevel edges, V4.

SURFACE FEATURES

Certain contemporary colours display embossed timber visuals, and textures. Water based PU Matte coating.

ACOUSTIC VALUE

L'nT,w - 43. AAAC⁵ Star Rating - 5 Star, Complies with NCC

FIRE TEST & VOC EMISSIONS

CHF Value, 5.3Kw/m². Smoke Value, 220% min. < E1, FloorScore Certified SCS-EC10.3-2014 v4.0

SLIP TEST

AS 4586:2013 Appendix A, Slider 96 Wet Pendulum P4







For warranty support our hybrid floors must be installed with 200 μ m builders' film on all subfloors to impede either moisture from below or concrete vapour ingress. Installation guidelines including perimeter & room to room expansion requirements must be followed for warranty compliance. The IXPE underlay is acoustic only, it is not a moisture barrier.

HYDROPLANK NEW GEN WPC FLOORING

